




Front

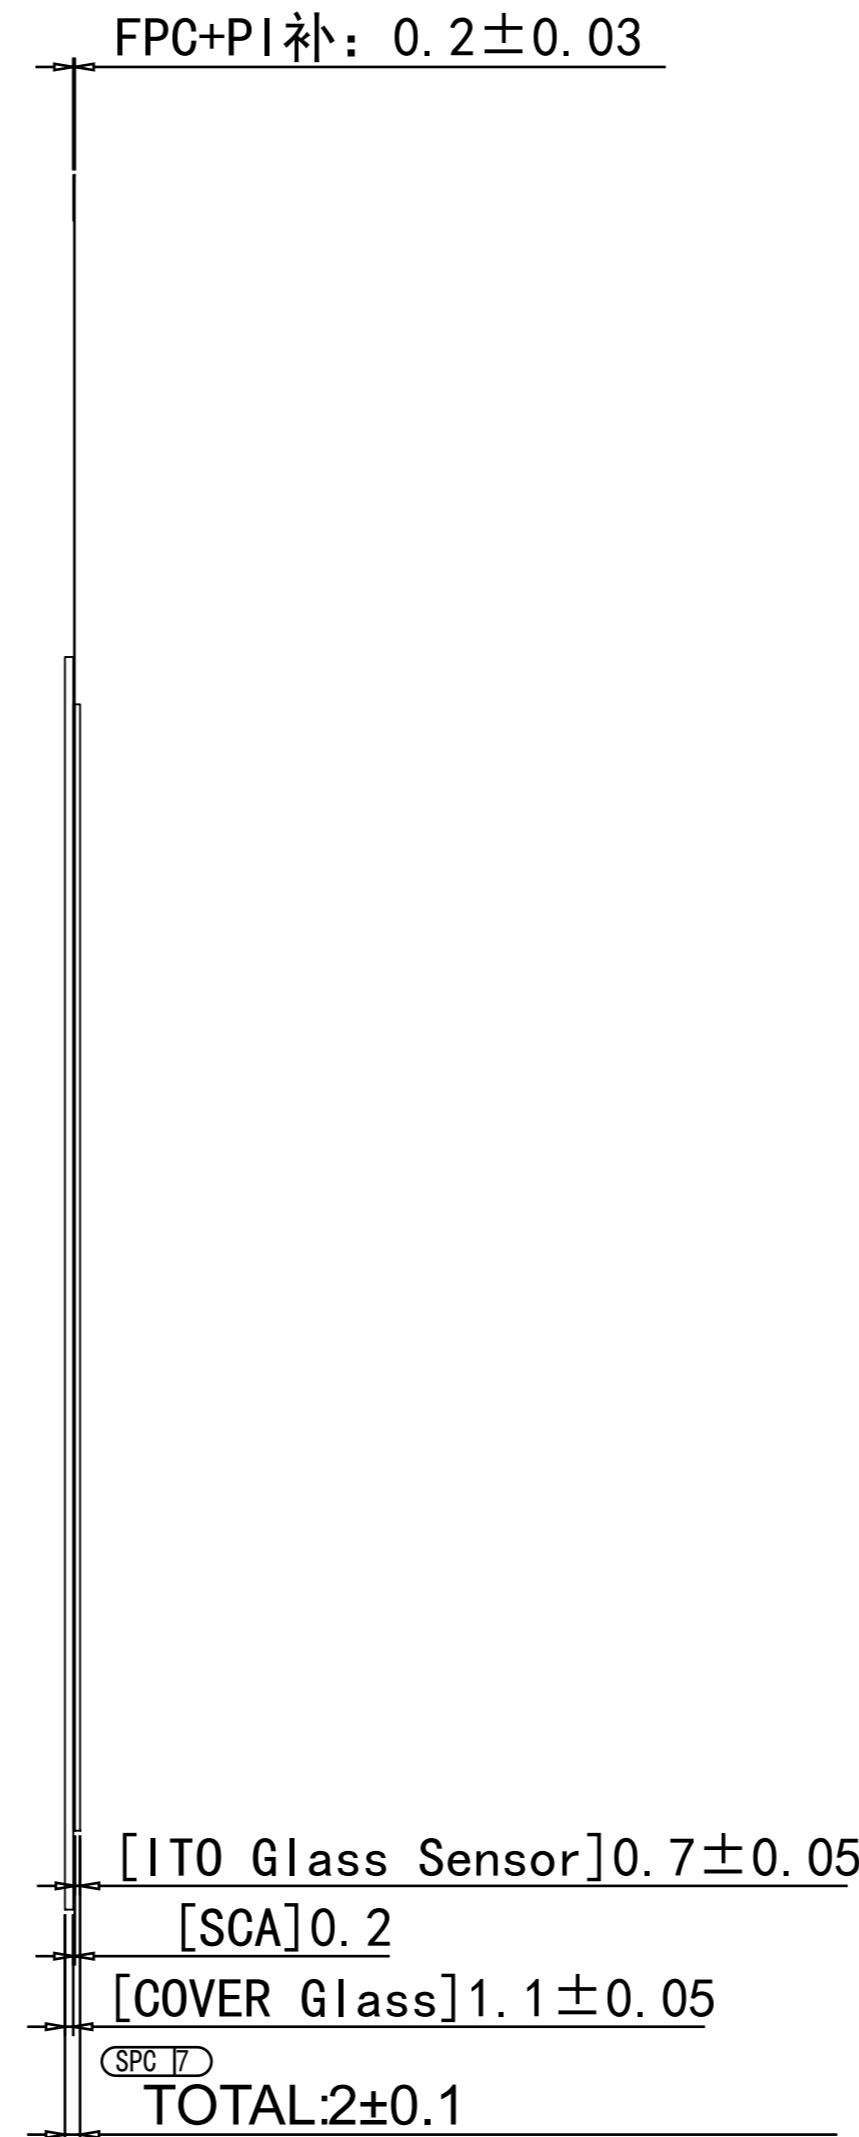

Side

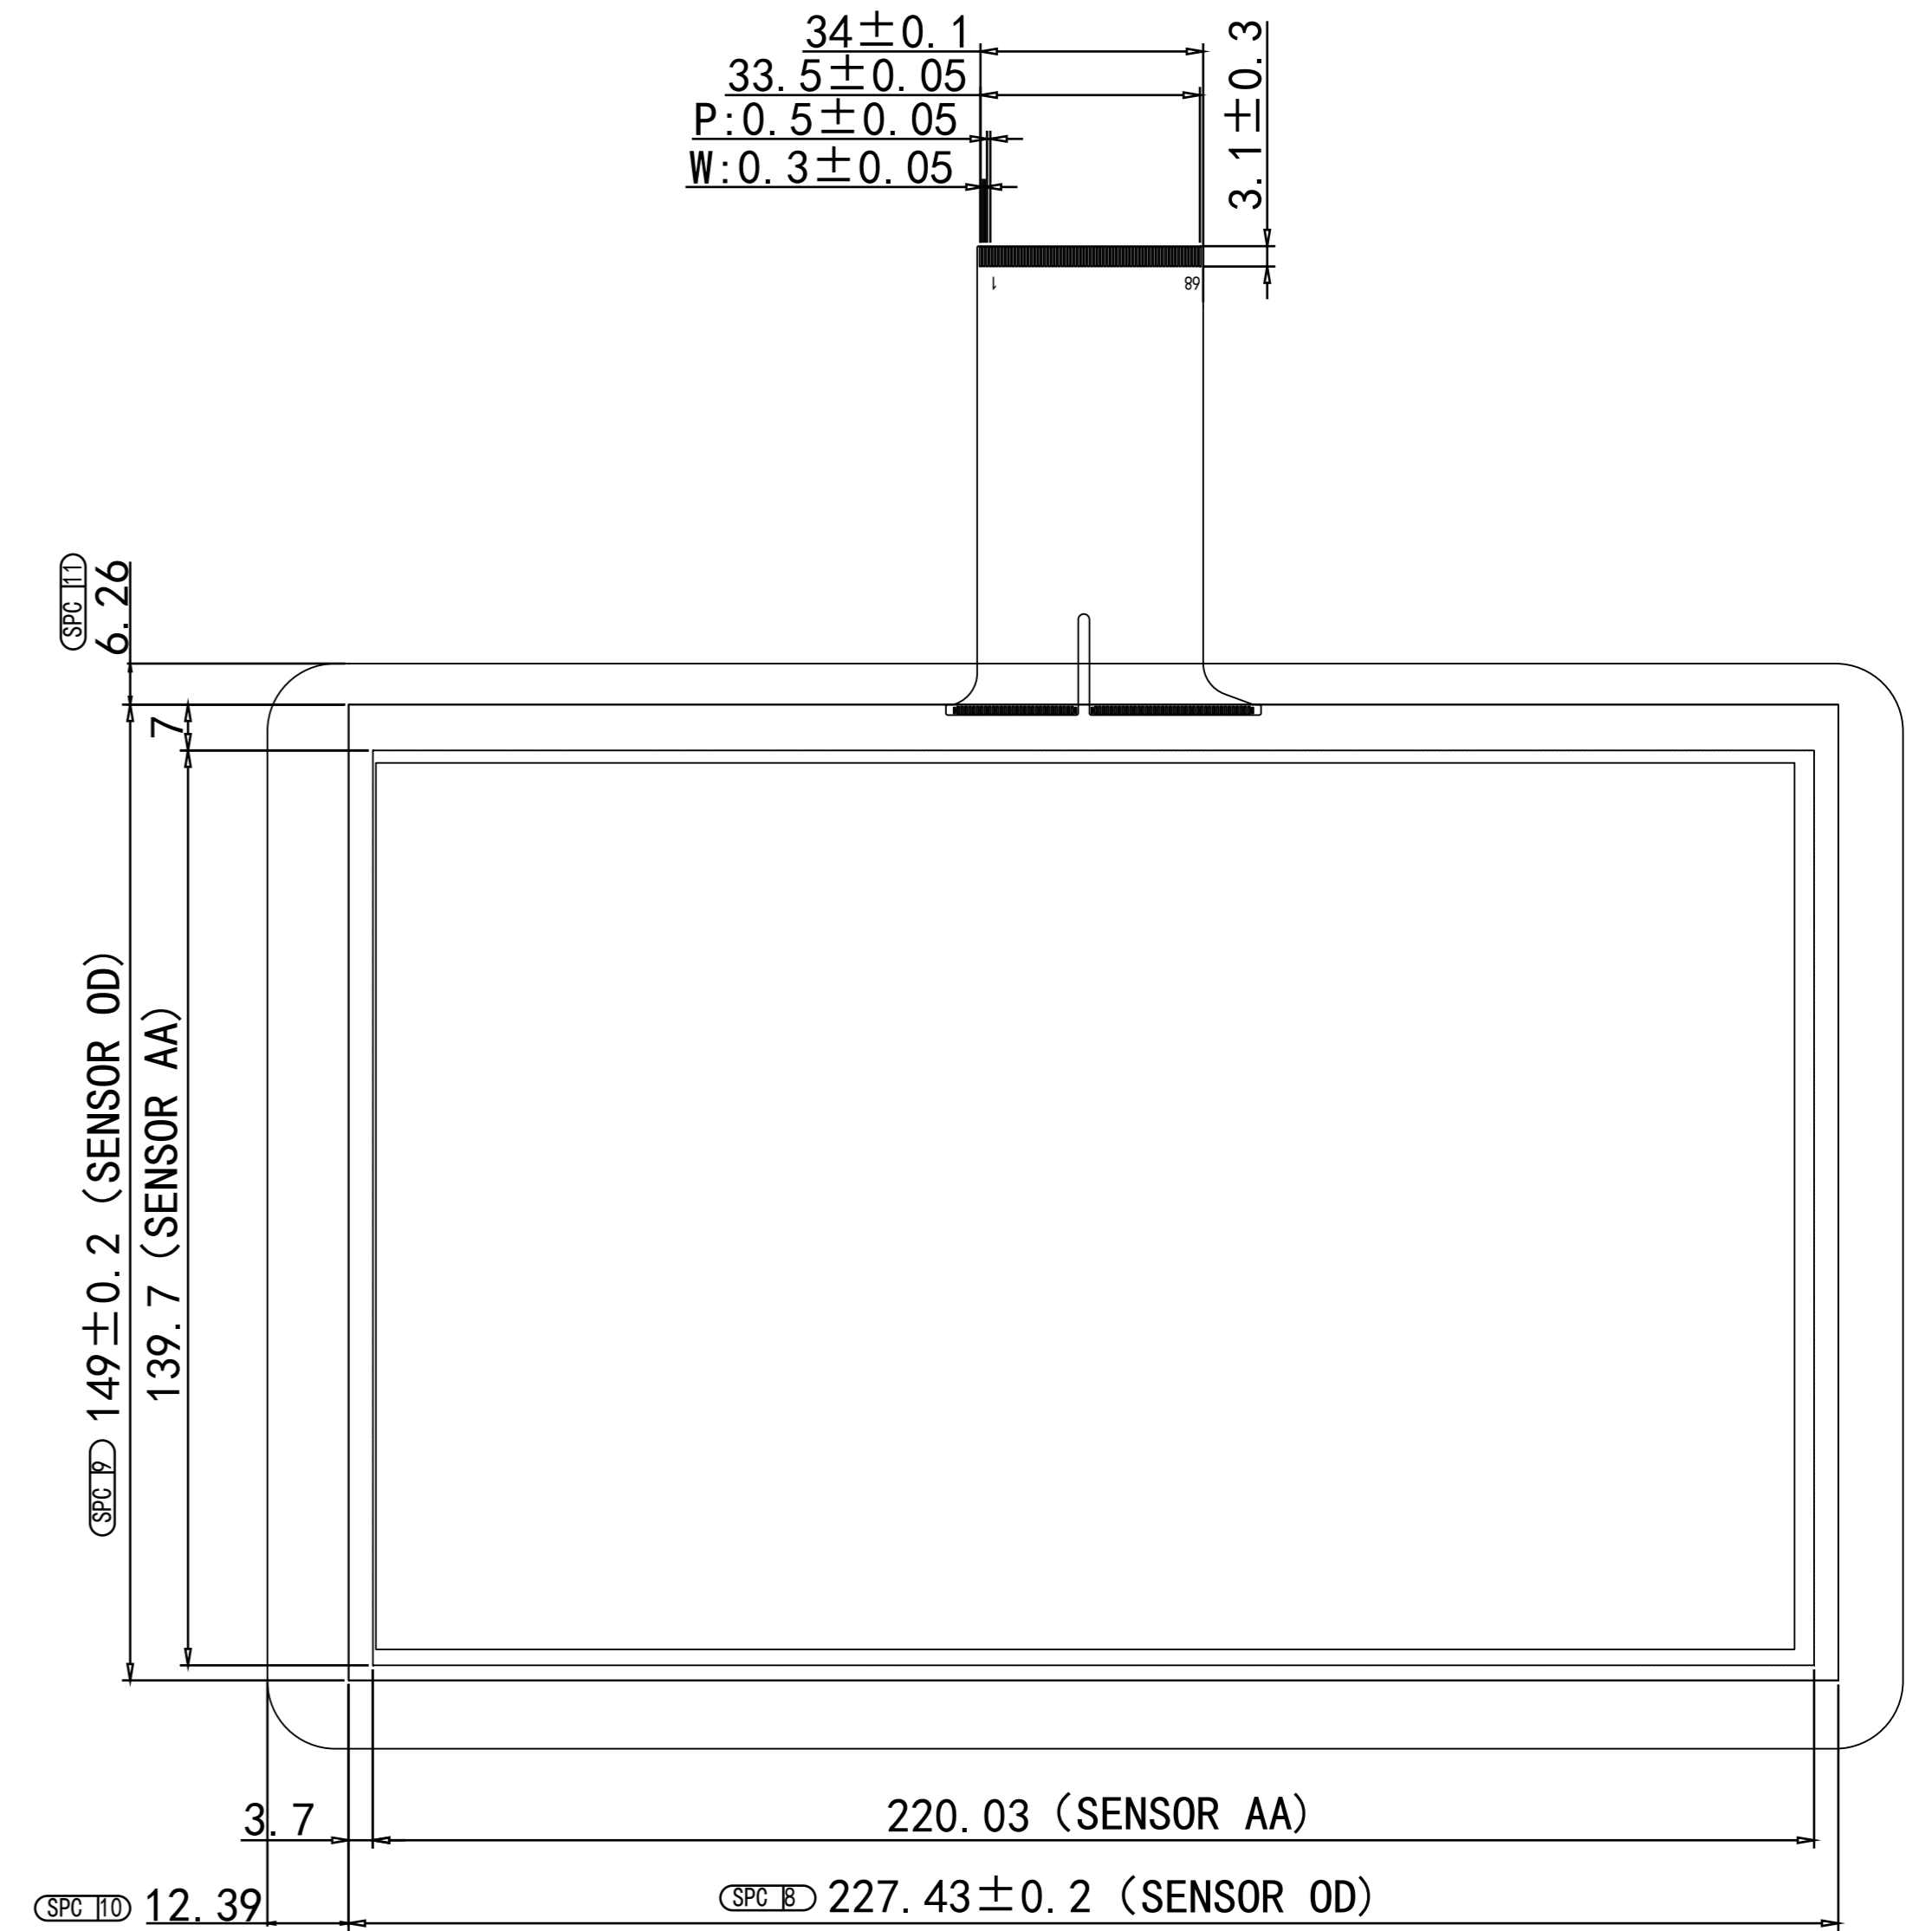

Back

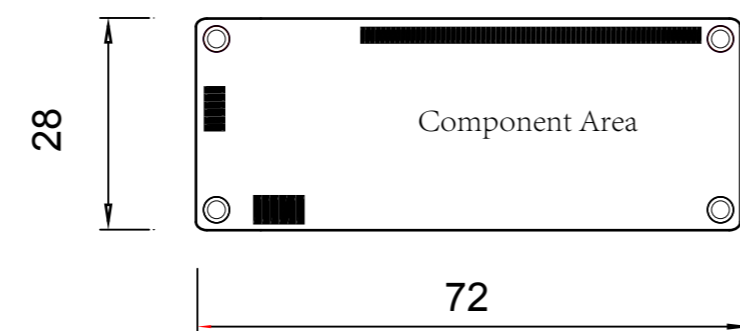

Technical parameters

- Cover Glass+Loca+ITO Glass+FPC
ITO Glass: $T=0.7 \pm 0.05$ mm
Cover Glass: $T=1.1 \pm 0.05$ mm
SCA= 0.2 mm
Controller: ILI2511 Interface: USB+IIC
- Surface hardness: $\geq 6H$
- Transmittance: $\geq 85\%$
- Operation voltage: $3.3V$
- Operation temperature: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$
- Storage temperature: $-30^{\circ}C \sim +80^{\circ}C$, $\leq 85\%RH$
- ROHS must be complied
- Unspecification tolerance are ± 0.2 mm

USB IFS	
PIN	DFNI
1	VDD/5V
2	D-
3	D+
4	GND

Wintouch Shenzhen United Touch Technology Co.,LTD		
DRAWN BY: Wei	Model: WT101-3136D	VIEW:
CHECKED BY: Wei	Part No: 10.1 inch	
APPROVED BY: Chen	VERSION NUMBER: A	UNITS: mm
Standard tolerance:	DATE: 05/25/2018	SCALE: 1:1